



Subsidiary of Federal Signal Corporation

Interchangeable Truck Body System

SALT SPREADER BODY



FEATURES

- Superior Weight Distribution as compared to non-specialized upfits
- 2.5 (9')/4.8 (11') Cubic Yard 304 Stainless Steel V-Box
- 12" Angled Front Extension
- 9" Rear Cutout for Conveyor
- Sloped Front Design
- Retractable Legs for interchangeability & storage without removing the chute
- 16,500lb maximum load operation
- Expanded metal subframe floor cut-outs to prevent material buildup

FIND A DEALER IN YOUR AREA

SWITCHNGO.COM/DEALER



607 Erie Street - Saegertown, PA 16433
888 311-0867



ZINC EPOXY PRIME &
POLYESTER TOPCOAT

MADE IN THE
USA




**9" Rear Cutout
for Conveyor**



**12" Angled
Front Extension**



**Available in Electric
& Hydraulic Models**

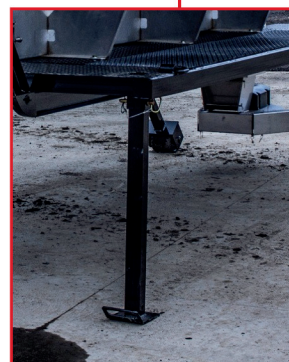

Retractable Legs

SPECIFICATIONS

	8' ELECTRIC	11' ELECTRIC	11' HYDRAULIC
WORKING LOAD LIMIT	16,500 LBS	16,500 LBS	16,500 LBS
SPREADER CAPACITY	2.5 YD	4.8 YD	4.8 YD
SPREADER SPINNER	1/2 HP, 12V MOTOR	1/2 HP, 12V MOTOR	DIRECT MOUNT HD
SPREADER CONVEYOR	3/4 HP, 12V MOTOR	3/4 HP, 12V MOTOR	20:1 WORM GEAR BOX
ATTACHMENT POINTS	4 D-RINGS RATED AT 4,080 LBS		
FLOOR	SOLID 1/8" DIAMOND PLATE		
REAR CUTOUT	35 1/8" WIDE X 9" DEEP		
LEGS	UNPIN AND RETRACT		

Specifications are subject to change without notice. For warranty information on this or any other Switch-N-Go® product please refer switchngo.com/warranty.

